

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 20 TOWNSHIP 15 RANGE 5

DATE: -9-11-99 8-26-2000 6-28-05

PARTY CHIEF: Whiteside Wilcoxon

CREW:

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 6-14-93


EDM

IN. S.P.C. E ZONE, NAD 83

NAME: 15052001

N: 498727.5199(m)

E: 70688.7638(m)

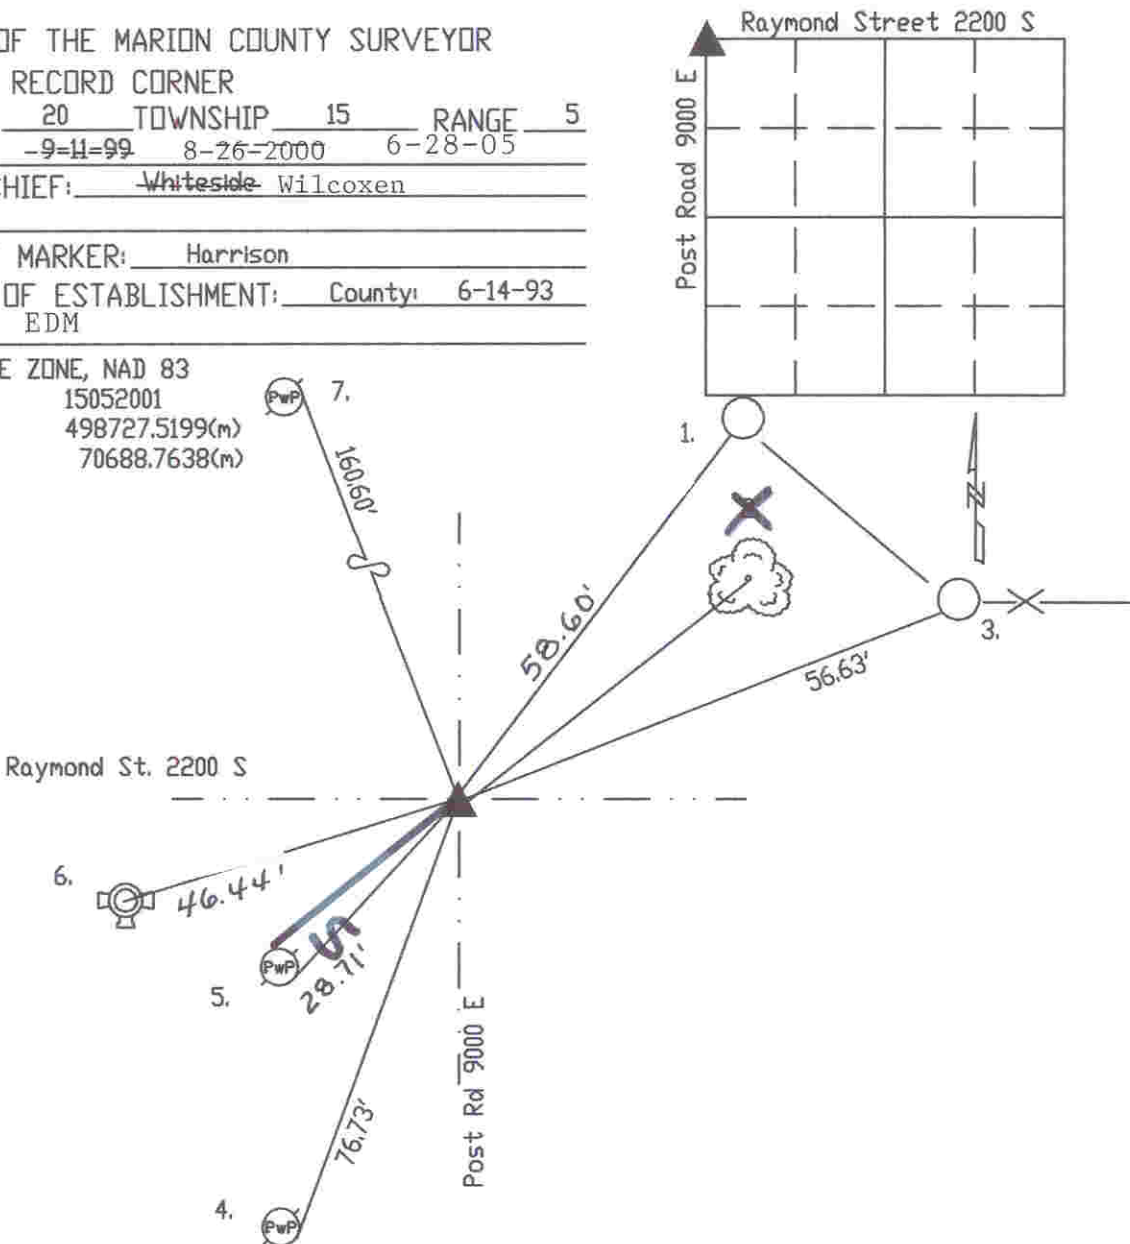

Original post set 1820 by Hendricks with witnesses: 14" beech S 54 W 18 links, 30" ash N 75 E 7 links per Marion County Atlas pg. 14. Hosbrook 4-16 & 17-1855 called rock set with witnesses: 18" beech W 63 links per Warren Township Legal Survey Book pg. 36. Burres 8-23-56 called a railroad spike. Hankins 6-23-58 called road nail w/brass washer. Monroe 10-30-59 called the same. McLand 1-31-69 called a PK nail. Fortner 1-28-75 called a steel pin. 8-27-87 called a PK nail. Wilcoxon excavated 6-25-93 and PK nail found at surface, road nail w/brass washer found 6 1/2" down. Stone found 23"x12"x18" 15" down. Harrison set 6-14-93 by Wilcoxon. Re-tied 9-11-99 by Whiteside.

HC552001

REF.	DISTANCE	DESCRIPTION
1.	58.60'	Face of steel fence post
2.	52.48'	PK nail w/washer S 24° ash 18" up
3.	56.63'	Face of steel fence post
4.	76.73'	PK nail SE PwP#66-621 12" up
5.	28.71'	PK nail SE PwP#18-621 12" up
6.	46.44'	Top nut of fire hydrant
7.	160.60'	Mag nail E PwP#19-621 10" up